
Technical SpecificationOLP/240/CBP/8W/DA High Output Centrally Supplied DALI Bulkhead





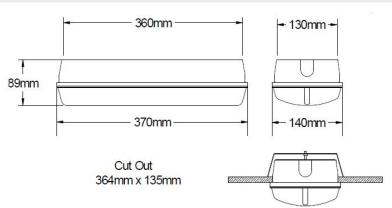

- IP65 Ingress Protection
- 1163 Lumen in Mains and Emergency
- Makrolon Diffuser with High LOR
- 3rd Party Photometrically Tested
- Operates with a DALI-2 Driver
- High Output for Higher Ceilings
- Maintained Changeover Operation
- Operates with a 220-240V AC/AC CBS

The OLP/240/CBP/8W/DA is a high quality emergency LED bulkhead which is designed for interior and exterior applications.

The high output LED strip provides 1163 lumen in mains and emergency operation after the diffuser. The product is designed to operate from 220-240V AC/AC central battery systems.

Order Code:

OLP/240/CBP/8W/DA	Maintained Changeover IP65 DALI-2 LED Bulkhead to operate
	from 230V AC/AC central battery systems

Technical Details:

Input Voltage	230-240 Volts 50/60Hz	Mains Output	1163 Lumen
Power Rating Standby	$2W 14mA \lambda = 0.58$	Light Source	Vossloh-Schwabe 8W Strip
Power Rating Emergency	11W 52mA λ = 0.89	Mains Cable Terminal	0.5mm² to 2.5mm² Cable
Power Rating Maintained	13W 65mA λ = 0.84	Beam Angle	125° x 117°
Ingress Protection	IP65	Dimensions	370mm x 140mm x 89mm
Colour Temperature	4000K	Weight	2.1Kg
Ta	25 °C	CBS Terminal	0.5mm² - 2.5mm² Cable

Tel +44 (0)1708 372223 | www.liteplan.com | customerservice@liteplan.com | RM3 OAP. UK





